


Lifting Beam T-K-SL

Product information

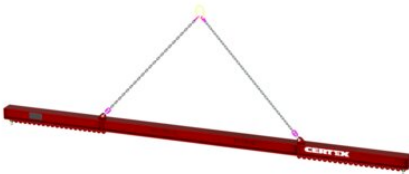

The lifting beam of the T-K-SL series has a 2-strand chain suspension for single hooks according to DIN 15401 on the crane side and shackle bars on the load side. The matching shackles are included in the scope of delivery. You are able to expand the lifting beam with additional equipment from our web shop. The lifting beam is supplied in the standard color RAL 3000 (flame red), other colors are also possible on request.

For other intermediate sizes and load capacities, you can also send us an inquiry [... Read more](#)

Material: Construction steel

Marking: According to standard, CE-marked


Temperature range: -20 °C up to +100 °C

Finish: RAL 3000 (red flame)

Standard: EN 13155

Lifting Beam T-K-SL

Blueprint

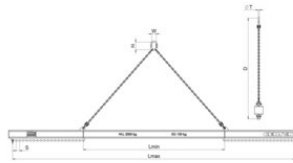

Technical data

Part code	WLL ton	Length m	D, in	H, in	L min. mm in	L max. mm in	S in	T in	Wmm in	Weight kg
6205TKSL22000	2	1-2	34.92	4.33	39.37	78.74	1.97	0.63	2.36	46
6205TKSL23000	2	1.5-3	45.63	4.33	59.06	118.11	1.97	0.63	2.36	77
6205TKSL24000	2	2-4	56.69	4.33	78.74	157.48	1.97	0.63	2.36	100
6205TKSL25000	2	2.5-5	67.48	4.33	98.43	196.85	1.97	0.63	2.36	157
6205TKSL26000	2	3-6	78.78	4.33	118.11	236.22	1.97	0.63	2.36	231