


S-4 Webbing slings with D-triangles

Product information

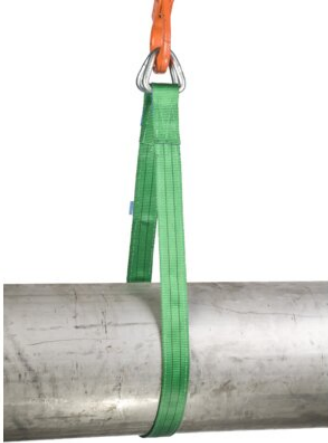

These professional webslings are suitable exclusively for intensive industrial applications.

Properties

- Duplex version; double band layer.
- WLL stripes, each stripe is 1 ton.
- Every 30 mm band width is 1 ton load capacity.

[... Read more](#)

Marking: According to standard, CE-marked

Standard: EN 1677-1, EN 1492-1

Note: Packed in plastic including REMA manual.