


Lifting Triangle

Product information

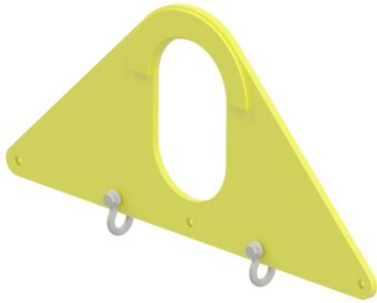

CERTEX

General: The lifting triangle has the same function as a short beam or a spreader. Given working load limits are valid for a maximum top sling angle of 90°. For top angles between 90°-120° working load limit shall be reduced by 30%. All lifting triangles are supplied with 2 shackles according to table. Working load limit in the centre shackle hole is equal to the working load limit of the shackle according to the table.

Design: Cut sheet metal. Wear plates and spacers for the shackles.

Proof: Batch proof 2 x WLL.

[... Read more](#)

Material: Plate of high-strength structural steel.


Marking: WLL and CE-marking.

Finish: Yellow painted.

Note: Other loads and dimensions are available on request.

Lifting Triangle

Blueprint



Technical data

Part code	WLL ton	Shackle	A in	B in	H, in	K in	L in	Weight kg
620566700209	2	11.311	9.84	5.91	13.39	11.42	27.56	13
620566700409	4	11.311	9.84	5.91	14.17	11.42	27.56	20
620566700609	6	11.311	9.84	5.91	14.76	11.42	27.56	31
620566701009	10	11.311	11.81	7.09	18.11	14.17	34.25	55
620566701509	15	11.311	11.81	7.09	19.29	14.17	34.25	74
620566702009	20	11.311	11.81	7.09	20.67	14.17	34.25	100